

SHV CONNECTORS

高電圧の機器に主に使用され、定格電圧3.5kVと優れています。


SHV connectors are suitable for high voltage applications up to 3.5kV RMS.

仕様 (Specifications) <数値は代表値です。詳しくはお問い合わせください>

- 相当規格 (Compatible Standards): MIL-C-39012
- 特性インピーダンス (Impedance): 不整合 (Non-Matching)
- 結合方式 (Connection): バイオネットロック方式 (Bayonet Coupling)
- 定格電圧 (Voltage Rating): AC 3,500V
- 接触抵抗 (Contact Resistance): 3mΩ max. at DC 1A
- 耐電圧 (Maximum Voltage): AC 5,000V one minute
- 絶縁抵抗 (Insulation Resistance): 1,000MΩ min. at DC 500V

PLUGS


<ケーブル用プラグ> 

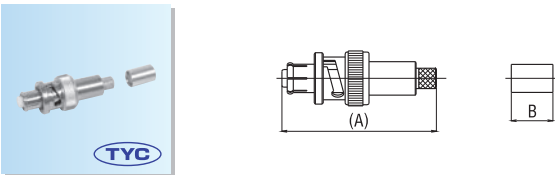

型番 (Model No.)	A	B	表面処理 (Finish) 本体 (Body)	中心コンタクト (Center pin)	適合ケーブル (Compatible Cables)	結線方式 (Attachment)	圧着工具 (Crimping tool)
SHVP-59/U	40.5	11.5	Ni	Au	RG-59/U	中心: 圧着 外部: 圧着	TA-34
SHVP-58/U	42.0	8.25	Ni	Au	RG-58/U, RG-58A/U		

PANEL JACKS


<ケーブル用パネルジャック> 

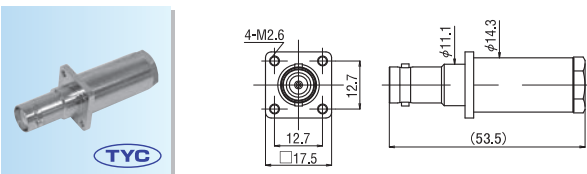

型番 (Model No.)	表面処理 (Finish) 本体 (Body)	中心コンタクト (Center pin)	適合ケーブル (Compatible Cables)	結線方式 (Attachment)
SHV-PJ-59/U★	Ni	Au	RG-59/U	中心: 半田 外部: 締付

RECEPTACLES


<レセプタクル> 

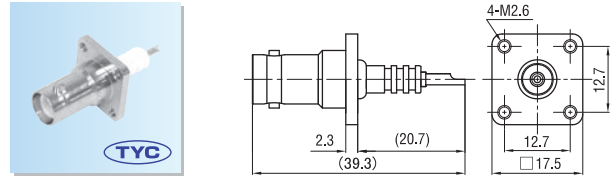

型番 (Model No.)	表面処理 (Finish) 本体 (Body)	中心コンタクト (Center pin)	ターミナル形状 (Terminal Type)
SHV-R	Ni	Au	溶剤 (Solder)

BULKHEAD RECEPTACLE


<ナット留め式パネルレセプタクル> 

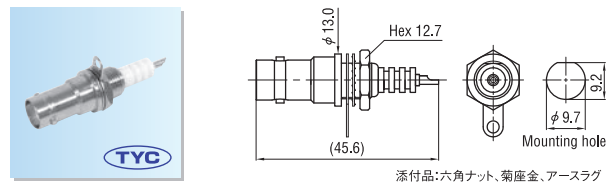

型番 (Model No.)	表面処理 (Finish) 本体 (Body)	中心コンタクト (Center pin)	ターミナル形状 (Terminal Type)
SHV-BR	Ni	Au	溶剤 (Solder)

BULKHEAD PLUG RECEPTACLE


<ナット留め式プラグレセプタクル> 

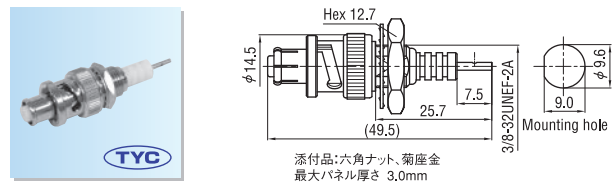

型番 (Model No.)	表面処理 (Finish) 本体 (Body)	中心コンタクト (Center pin)	ターミナル形状 (Terminal Type)
SHV-PBR*	Ni	Au	溶剤 (Solder)

ADAPTERS

<中継用アダプター> 

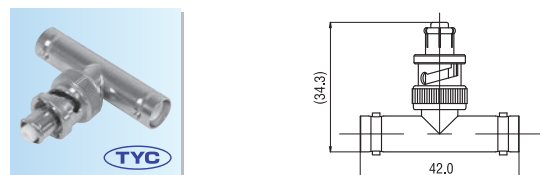

型番 (Model No.)	表面処理 (Finish)	
	本体 (Body)	中心コンタクト (Center pin)
SHV-TA-JPJ★	Ni	Au

● We accept small quantity orders on items marked with a ★
 ● Products marked with '*' are made only upon request. ● Please note that the products listed herein may be discontinued or their specifications changed at any time without prior notice.
 ● The dimensions shown herein are intended for reference only. Please be sure to request diagrams and specifications to check the actual dimensions.

- SMA
- SMB
- 2.92mm(K)
- 3.5mm
- SMP
- MCX
- MMCX
- H-BNC
- BNC50Ω
- BNC75Ω
- TNC
- N50Ω
- N75Ω
- S
- 7/16 DIN
- 4.3/10
- NXT
- MQ
- IN/BETWEEN SERIES ADAPTORS
- TERMINATION
- ATTENUATOR
- M
- F
- MC
- RCA
- HN
- MHV
- SHV
- QUICK ADAPTER FOR MEASUREMENT
- HIGH FREQUENCY CABLE FOR MEASUREMENT
- SEMI-FLEXIBLE CABLE
- SEMI-RIGID CABLE
- CABLE ASSEMBLIES
- CRIMPING TOOL