


DIMENSIONAL TOLERANCE TABLE	
TOLERANCE	DIVISION
Less than 4.0	±0.3
4.0~16.0	±0.5
16.0~63.0	±0.7
63.0~250.0	±1.2
250.0~1000.0	±2.0

SCALE : mm

* 2

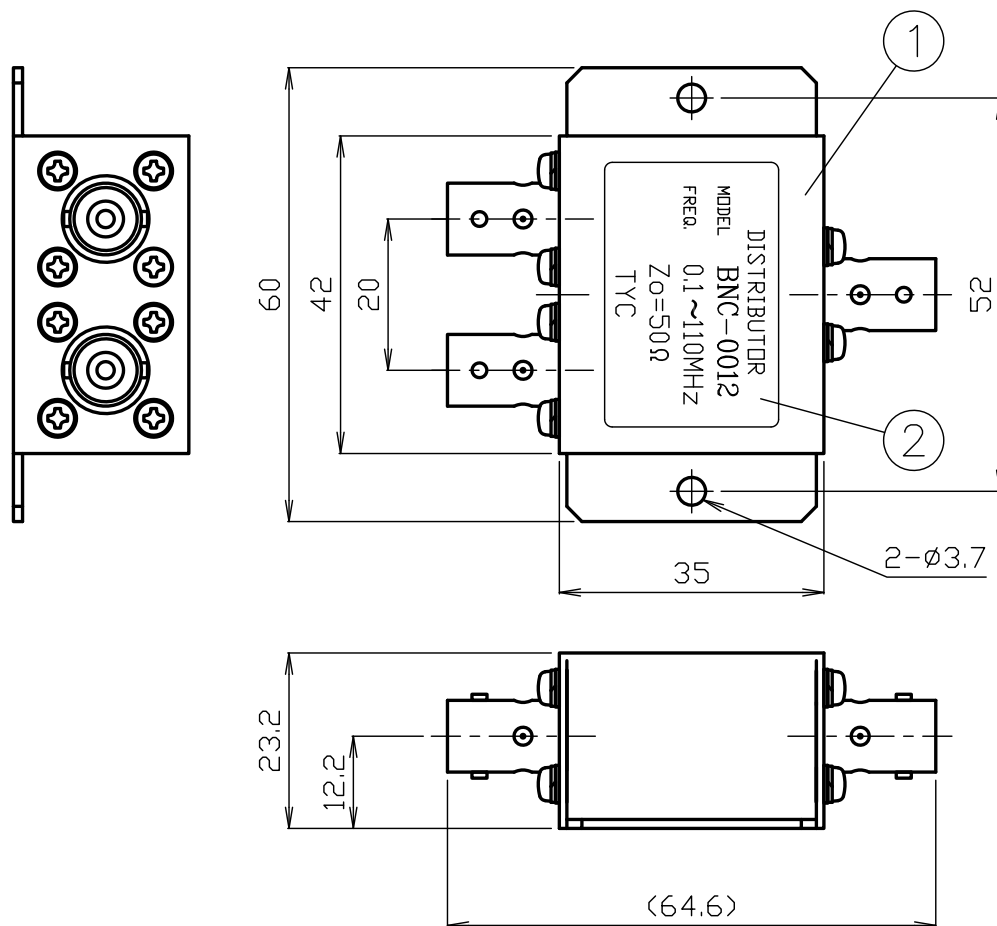

*1: SPCC, etc (COVER PART, COLOR: IVORY)

RoHS Compliant [Cd ≤75ppm]	
REMARKS	BRASS: Cd ≤75ppm PHOSPHOR BRONZE: Pb <4wt%

NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK	SCALE	DRAWN	INSPECTED	APPROVED	CHECKED	PART NUMBER
7						1/1	井	檜	山	三	BNC-0012
6						TOLERANCE	'24.04.15	'24.04.15	'24.04.15	'24.04.15	
5						* 2	出	澤	本	村	
4						UNIT					
3						mm					
2	LABEL	-----	1	--		DATE	PROJECTION				
1	BNC-J TYPE COAXIAL 2 DISTRIBUTOR	*1	1	--	BODY/Ni, CENTER PIN/Aq	2024.04.15					DRAWING NO. U-0396559

PRODUCT SPECIFICATIONS

Part number: BNC-0012

No. 0392673

Drawing number: U-0396559

Nominal	1 Standard	JIS C 5412
	2 Power handling	250mW
	3 Rated frequency	0.1MHz~110MHz
	4 Impedance	50Ω(unbalance)
	5 Operating temperature and humidity range	0°C~+50°C, 30~90%RH※No condensation
	6 Storage temperature and humidity range	-20°C~+70°C, 30~90%RH ※No condensation



		Test Items	Test Method/Value	Remarks
1	E L E C T R I C A L	Frequency characteristic	0.1MHz~110MHz:0.5dB(Max.)	
2		Isolation	0.1MHz~110MHz:25dB(Min.)	
3		VSWR	0.1MHz~110MHz:1.2(Max.)	
4		Insertion loss	0.1MHz~110MHz:3.5dB(Max.)	
5	M E C H A N I C A L O T H E R S	Compatibility	No defects or abnormalities	Connecting with a standard-compliant connector

※The structural shape is shown in the attached drawing (Drawing number:U-0396559)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared
 三 24.04.15 村	 山 24.04.15 本	 水 24.04.15 澤	 井 24.04.15 出

GKQM-24