
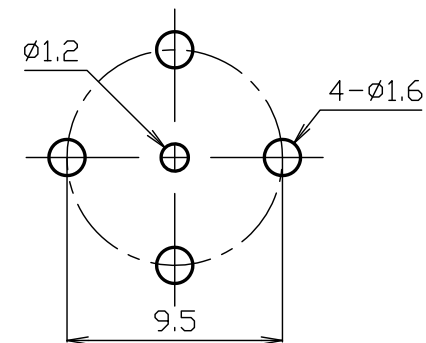
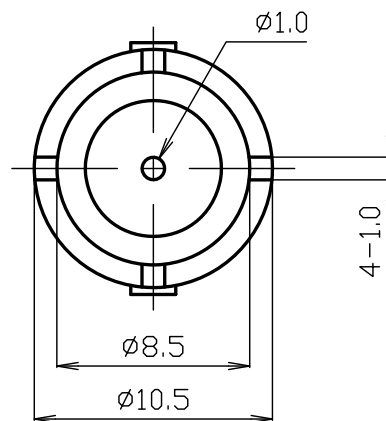


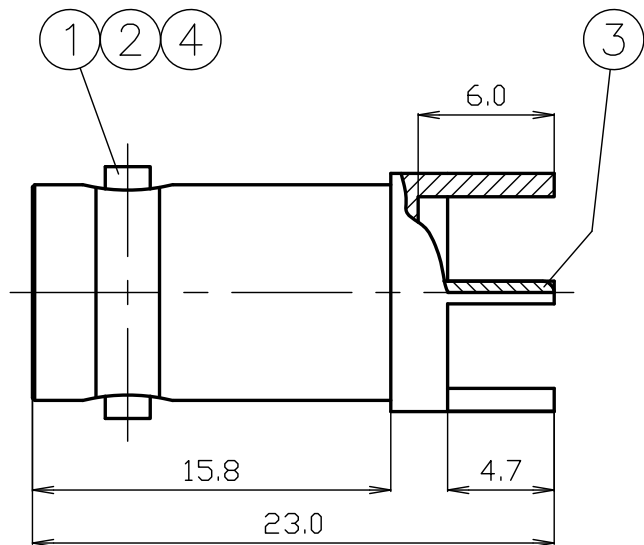

Mounting hole

*1: PHOSPHOR BRONZE

RoHS Compliant		Cd ≤75ppm
REMARKS	BRASS: Cd ≤75ppm PHOSPHOR BRONZE: Pb <4wt%	

7						SCALE	3/1	DRAWN	CHECKED	APPROVED	CONFIRMATION	PART NUMBER
6								渡邊	檜	山	三	
5								'23,03,14	'23,03,14	'23,03,14	'23,03,14	BNC-224R
4	BUSHING	BRASS	1	Ni				直弘	澤	本	村	
3	CENTER PIN	*1	1	Au		UNIT	mm					
2	INSULATOR	PTFE	1	--								
1	BODY	BRASS	1	Ni		DATE	2023.03.14	PROJECTION				
NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK							DRAWING NO. J-0332371



株式会社 トーコネ
TO-CONNE CO., LTD.

PRODUCT SPECIFICATION

Part number: BNC-224R

No. 0330817

Drawing number: J-0332371

Nominal 1 Standard JIS C 5412
 2 Voltage Range AC 500V
 3 Frequency(Max GHz) 4GHz
 4 Impedance 50 Ω
 5 Operating Temperture Range -40°C~+85°C



株式会社 トーコネ
 TO-CONNE CO.,LTD.

	Test Items	Procedures/Test Method	Requirements
1	STRUCTURE	Design and Construction	No defects or abnormalities
2		Materials	
3		Finish	
4	ELECTRICAL	Insulation Resistance	DC 500V
5		Withstand Voltage	AC 1500V for 1 minute
6		Contact Resistance	The method of which, the voltage drop of the contact duration should not exceed about 1-kHz AC or 1mV DC
7	MCHANICAL	Compatibility	Mating with connector complying with the standard
8		Engagement Force	When axial tensile force of 245N is applied

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Proof mark	Prepared
三 23.03.14 村	山 23.03.14 本	檜 23.03.14 澤	渡邊 23.03.14 直弘

GKQM-7