


添付品:六角ナット
取付可能パネル厚さ 1.0~3.0mm

型番 (Model No.)	表面処理 (Finish) 本体 (Body) 中心コンタクト (Center pin)	リターンロス (Return Loss)
H-BNC-R-PC	Au Au	15dB min. at DC~12GHz

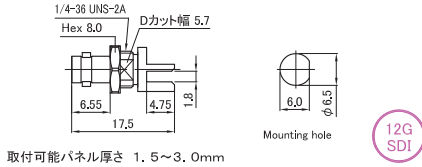


取付可能パネル厚さ 1.5~3.0mm



型番 (Model No.)	表面処理 (Finish) 本体 (Body) 中心コンタクト (Center pin)	基板取付形式 (Attachment Type)	リターンロス (Return Loss)
H-BNC-BR-EL	Au Au	エッジマウント (Edge Mount)	20dB min. at DC~6GHz, 15dB min. at 6~12GHz

OTHER TOOLS

〈その他ツール〉

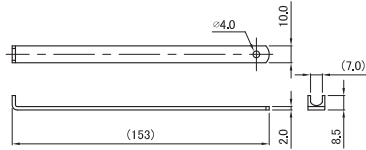

型番 (Model No.)	表面処理 (Finish)
HT-HB (H-BNC脱着工具)	—



型番 (Model No.)	表面処理 (Finish)
HT-MNB1 (丸ナット用ビット)	Ni

● We accept small quantity orders on items marked with a ★
● Products marked with '*' are made only upon request. ● Please note that the products listed herein may be discontinued or their specifications changed at any time without prior notice.
● The dimensions shown herein are intended for reference only. Please be sure to request diagrams and specifications to check the actual dimensions.

SMA
SMB
2.92mm(K)
MCX
MMCX
H-BNC
BNC
BNC75Ω
TNC
N
N75Ω
S
7/16
4.3/10
IN-SERIES
TERMINATION
ATTENUATOR
M
F
F (C15)
MC
RCA
HN
MHV
SHV
FOR TEST & MEASUREMENT
CABLE ASSEMBLY
CRIMPING TOOL