



指定外寸公差(单位: mm)	
寸法区分	公差
4.0未満	±0.3
4.0~16.0	±0.5
16.0~63.0	±0.7
63.0~250.0	±1.2
250.0~1000.0	±2.0

※1

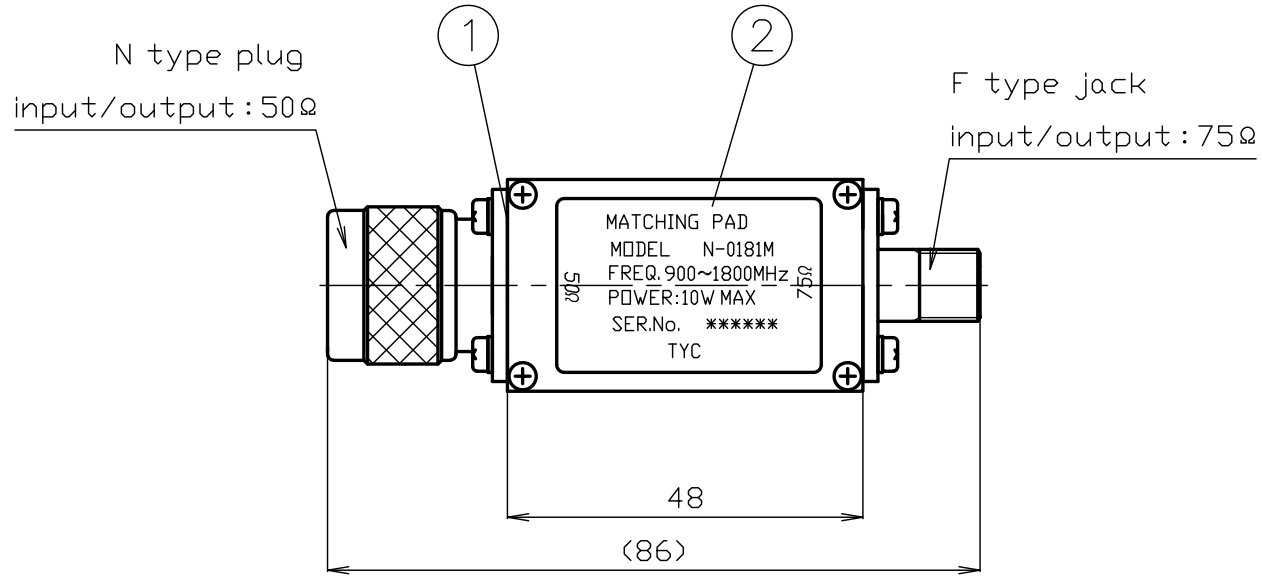

RoHS Compliant [Cd ≤75ppm]

REMARKS BRASS: Cd ≤75ppm
PHOSPHOR BRONZE: Pb <4wt%

NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK	SCALE	DRAWN	INSPECTED	APPROVED	CHECKED	PART NUMBER
7						1/1	井	檜	山	三	N-0181M
6						TOLERANCE	'24.04.10	'24.04.10	'24.04.10	'24.04.10	
5						※1	出	澤	本	村	
4						UNIT	PROJECTION				
3						mm					
2	LABEL	-----	1	--		DATE					
1	N-F TYPE IMPEDANCE CONVERTER	-----	1	--	BODY/Ni, CENTER PIN/Aq	2024.04.10					DRAWING NO. U-0696556

PRODUCT SPECIFICATIONS

Part number: N-0181M

No. 0692669

Drawing number: U-0696556

Nominal 1 Standard JIS C 5411(N type)、JEITA RC-5223(F type)

2 Power handling 10W

3 Voltage rating DC 25V

4 Rated current 2A

5 Rated frequency 1.8GHz

6 Impedance 50Ω←→75Ω



		Test Items	Test Method/Value	Remarks
1	E L E C T R I C A L	V.S.W.R.	N(P)Side : 1.2(Max.) F(J)Side : 1.3(Max.)	
		Insertion loss	900MHz~1800MHz : 0.5dB(Max)	
3	M E C H A N I C A L	Compatibility	No defects or abnormalities	Connecting with a standard-compliant connector
	O T H E R S			

※The structural shape is shown in the attached drawing (Drawing number:U-0696556)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared
三 24.04.10 村	山 24.04.10 本	檜 24.04.10 澤	井 24.04.10 出

GKQM-24