


指定外寸公差(单位: mm)	
寸法区分	公差
4.0未満	±0.3
4.0~16.0	±0.5
16.0~63.0	±0.7
63.0~250.0	±1.2
250.0~1000.0	±2.0

※1

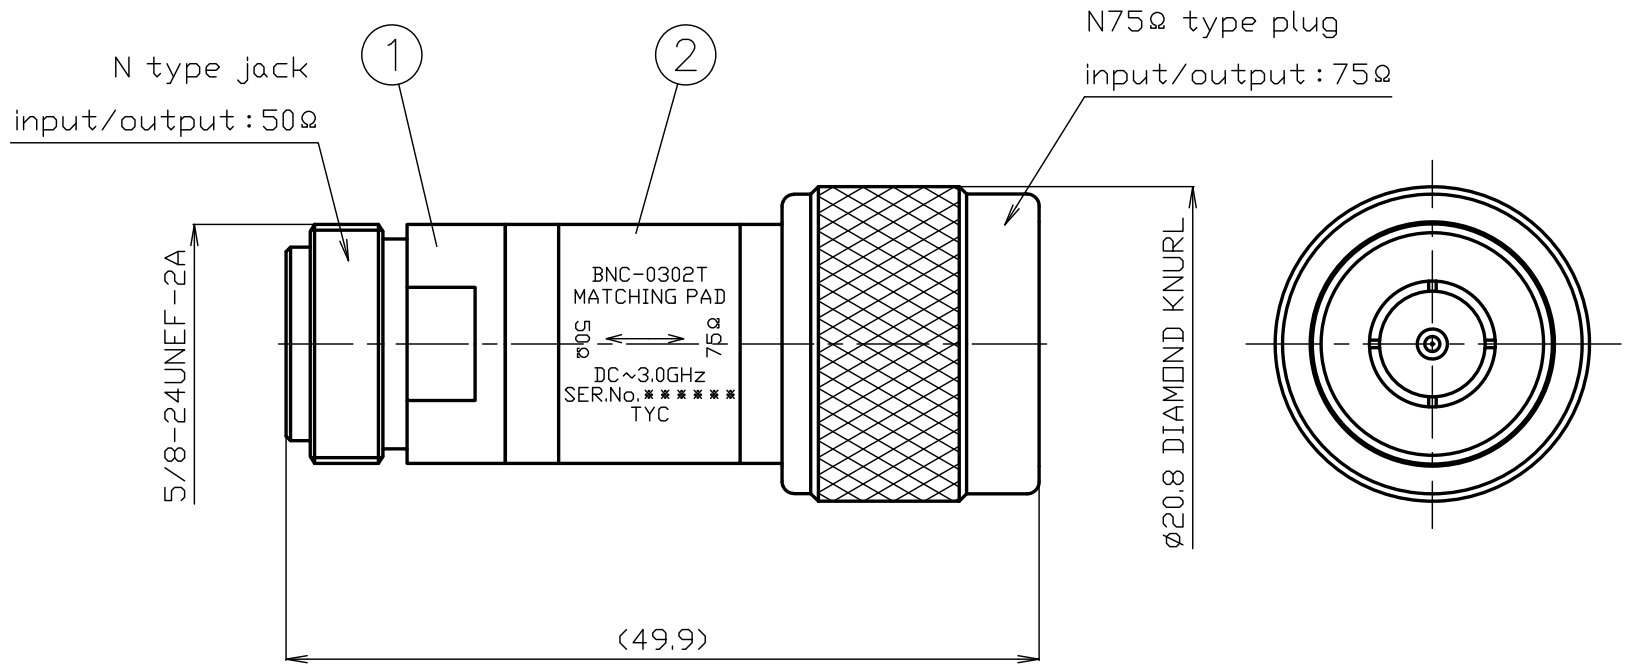

RoHS Compliant [Cd ≤75ppm]	
REMARKS	BRASS: Cd ≤75ppm PHOSPHOR BRONZE: Pb <4wt%

NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK	SCALE	DRAWN	INSPECTED	APPROVED	CHECKED	PART NUMBER
7						2/1	井	檜	山	三	N-0302T
6						TOLERANCE	'24,04,10	'24,04,10	'24,04,10	'24,04,10	
5						※1	出	澤	本	村	
4						UNIT					
3						mm					
2	LABEL	-----	1	--		DATE	PROJECTION				
1	N-N75Ω TYPE IMPEDANCE CONVERTER	-----	1	--	BODY/Ni. CENTER PIN/Au	2024.04.10					DRAWING NO. U-0596555

PRODUCT SPECIFICATIONS

Part number: N-0302T

No. 0592668

Drawing number: U-0596555

Nominal 1 Standard JIS C 5411(N50Ω)、IEC 169-16(N75Ω)

2 Power handling 0.5W

3 Rated frequency 3GHz

4 Impedance 50Ω←→75Ω



		Test Items	Test Method/Value	Remarks	
1	E L E C T R I C A L	V.S.W.R.	DC~3GHz : 1.2(Max.)		
2		Insertion loss	DC~2GHz : 5.7±0.5dB 2GHz~3GHz : 5.7±0.7dB		
3	M E C H A N I C A L	Compatibility	No defects or abnormalities	Connecting with a standard-compliant connector	
	O T H E R S				

※The structural shape is shown in the attached drawing (Drawing number:U-0596555)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared
三	山	檜	井
24.04.10	24.04.10	24.04.10	24.04.10
村	本	澤	出

GKQM-24