
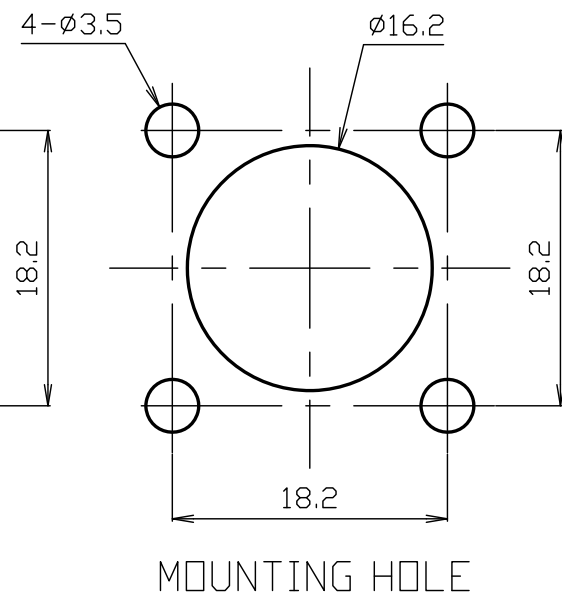
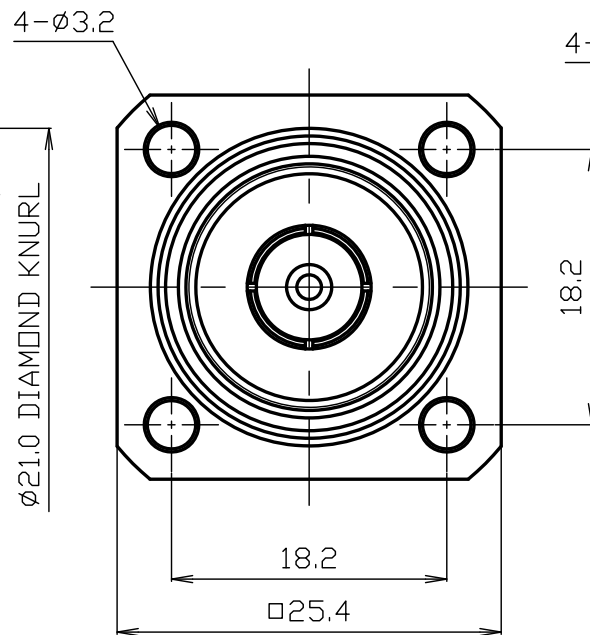


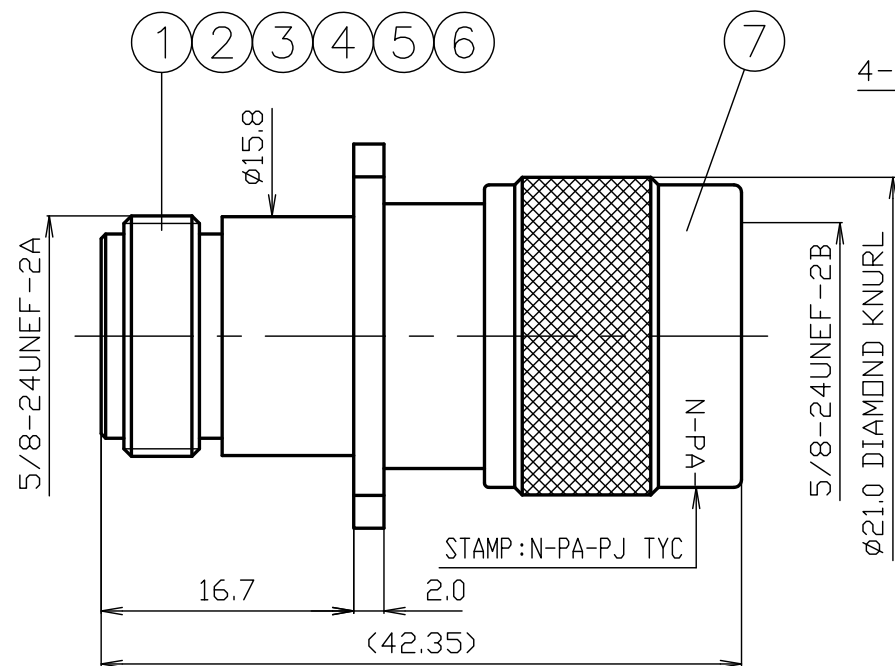

RoHS Compliant [Cd ≤75ppm]

REMARKS BRASS: Cd ≤75ppm
PHOSPHOR BRONZE: Pb <4wt%

*1: PHOSPHOR BRONZE

NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK	DATE	PROJECTION	DRAWN	INSPECTED	APPROVED	CHECKED	PART NUMBER
7	COUPLING NUT	BRASS	1	Ni		2023.12.06	直弘	渡邊	山	三		N-PA-PJ
6	GASKET	SILICONE	1	--								
5	OUTER CONTACT	BRASS	1	Ni								
4	HOLDING RING	*1	1	--								
3	INSULATOR	PTFE	2	--								
2	BODY	BRASS	1	Ni								
1	CENTER PIN	*1	1	Au								

SCALE 2/1

UNIT mm

DATE 2023.12.06

PROJECTION

株式会社 トーコン
TO-CONNE CO., LTD.

DRAWING NO. X-0573657

GKQM-22

PRODUCT SPECIFICATION

Part number: N-PA-PJ

No. 0541352

Drawing number: X-0573657

Nominal 1 Standard JIS C 5411
 2 Voltage rating AC 500V
 3 Frequency range 10GHz
 4 Impedance 50Ω
 5 Operating Temperature Range -40°C~+85°C
 6 Operating Humidity Range 95%RH(Max.) ※No condensation



	Test Items	Test Method/Value	Remarks
1	E L E C T R I C A L	Insulation Resistance	1000MΩ(Min.) at DC 500V
2		Withstand voltage	1 minute at AC 1000V
3		Contact resistance	3mΩ(Max.)
4		V.S.W.R	DC~3.5GHz : 1.2(Max.) 3.5GHz~10GHz : 1.3(Max.)
5	M E C H A N I C A L	Compatibility	No defects or abnormalities Mating with connector complying with the standard
6		Center contact retaining force	0.98N(Min.) With a standard pin gauge
7		Tensile strength of coupling mechanism	300N At axial tensile force
	O T H E R S		

※The structural shape is shown in the attached drawing (Drawing number:X-0573657)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Preparation
 23.12.06 村	 23.12.06 本	 23.12.06 澤	 '23.12.06 直弘

GKQM-24